



Туре

Features

- Pressurised lubrication
- Overhead V-valve
- Multi port digital fuel injection
- Cast iron cylinder liners
- High pressure pulse-type fuel pump
- Compact electronic control unit

Options

- Shaft variation: 1 1/8" x 80 mm
- Shaft variation: 1" x 80 mm
- Various speed control options
- Various oil drain & starter options
- Heavy duty canister air filter
- Shaft variation: 1 1/8" x 110 mm
- 13, 20 or 30 Amp Charge coil


FD Series

Technical Specifications

 Engine Type 	Liquid-cooled, 4-stroke, Horizontal shaft, OHV
 Max. power 	17.7 kW (23.7 hp) / 3600 rpm
 Oil capacity (litres) 	2.0 litres
 Number of cylinders 	2
 Displacement 	745 cm³
Dimensions (L x W x H) (mm)	520 x 458 x 580
 Bore x stroke 	78 x 78 mm
 Fuel tank capacity (litres) 	
 Max. torque 	51.3 Nm (37.8 ft.lbs) / 2400 rpm
 Dry weight 	57.0 kg

Performance curves

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349.Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

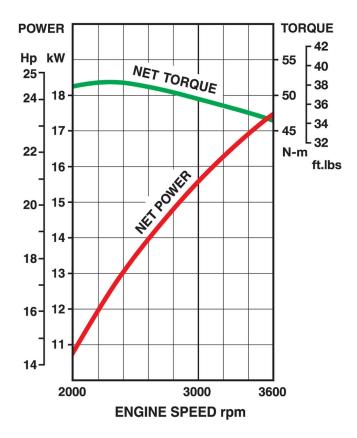



FD Series FD750D DFI